



## Effects of compaction pressure on the temperature distribution in bunker type silage silo

FULYA TAN<sup>1</sup>, BIROL KAYISOGLU<sup>2</sup> and ERSEN OKUR<sup>3</sup>

*Namik Kemal University, Tekirdag-Turkey*

Received: 14 February 2017; Accepted: 7 August 2017

### ABSTRACT

The aim of the research was to determine effects of compaction pressure on temperature distribution in the silage material in bunker silo. The pressure measurement system developed within the scope of this research was used to measure the pressure distribution in the silo. Hobo E-348-UA-002-08 model temperature sensors were used for temperature measurements. All sensors were positioned in the silo at predetermined points. Temperature and pressure values were recorded in a datalogger during ensiling, fermentation and after fermentation stages. The data collection system was based on a graphical programming language NI LabVIEW software and NI CompactDAQ hardware modules. Work machine having palette of which weight was 13700 kg was used for compaction of maize silage. The average temperature of silage in the silo was 23.35°C during ensiling, 29.04°C during fermentation and 23.45°C the after fermentation stage. The maximum pressure on the silage material was applied during storage with a mean value of 0.34 bar. The highest temperature and pressure were on the line in the front of the silo while the lowest temperature and pressure were in the close to the rear wall of the silo. The effect of compaction pressure applied during the ensiling stage also continued during the fermentation stage. It was determined that there is a relationship between the pressure applied to silage and temperature. Results showed that temperature in the silage has been increased with increasing compaction pressure.

**Key words:** Bunker silo, Compaction pressure, Silage, Temperature

Compaction is an important criterion for measuring the quality of silage. In order to obtain a quality silage, it is necessary to increase the density and to remove oxygen from inside the silage as much as possible. For this, the silage must be compacted effectively.

Density and quality of silage are influenced by pressure, moisture, compacting vehicle mass and layer thickness (Roy *et al.* 2001). Muck and Holmes (2000) observed that density of silage is variable in bunker silos. Higher density in silage is important for silage quality and preservation for longer period of time. More dry matter is stored in the same volume and costs of storage are reduced. Savoie *et al.* (2004) found that the density of silage was affected by layer thickness and pressure but not by time of compaction under laboratory condition. Latsch (2014) indicated that one main problem in compacting work of silage in bunker silos seems to be the heterogeneity of bulk density. This problem occurs, when forage is not well distributed after unloading and peaks and troughs of grass lie directly side by side.

Borreani and Tabacco (2010) reported that quality of

silage is related to the temperature of silage mass in the bunker silo. Temperature is an important factor affecting silage stability, silage quality and protein damage during the entire storage period (Jiang *et al.* 1987).

Previous studies have generally examined the relationship between compaction and density. There are no studies to determine the pressure acting on the material. Most of the work is done in laboratory conditions. In this study, the relationship between temperature and compression pressure was determined in silo and site conditions.

### MATERIALS AND METHODS

Maize fodder was harvested at 27% dry matter by a forage harvesting machine (CLASS 940). The chopped material were ensiled in bunker silo. The measurement sensors were located inside silo at predetermined points during filling. A single compaction equipment was used for compaction. Temperature and pressure values were recorded in a datalogger during ensiling, fermentation and after fermentation stages.

*Compaction equipment:* The CAT 955 L type work machine having palette of which weight was 13700 kg was used to compact the silage material. The palette has a width of track shoe 0.43 m and a length of track on ground 2.35 m and ground contact area of palette was 2.03 m<sup>2</sup>.

Present address: <sup>1</sup>Associate Professor (ftan@nku.edu.tr), <sup>2</sup>Professor (bkayisoglu@nku.edu.tr), <sup>3</sup>Research Assistant (eokur@nku.edu.tr), Department of Biosystem Engineering, Faculty of Agriculture.

**Bunker silo and measurement points:** Bunker silo dimensions were 7500 mm × 27000 mm × 2250 mm. Figure 1 illustrates the 24 measurement points in bunker silos. Pressure and temperature measurement sensors were installed at these measuring points.

Three measurement lines were identified along the silo in front of the silo (C), in the centre (B) and behind it (A). Three points defined on each line (1.0 m from both the right (R) and left (L) side walls and in the middle (C) of the silo) and three heights (0.5 m, 1 m and 1.5 m from the floor). Temperature sensors were only located on the 1 m height from the floor layer.

**Data collection and storage:** The data collection system was based on a graphical programming language NI LabVIEW software and NI CompactDAQ hardware modules. Data were collected by using two NI 9208 24-bit analog input modules in a NI cDAQ-9184 chassis. The NI 9208 current input module had 16 channels of ±21.5 mA input, high resolution mode with 50/60 Hz rejection for noise rejection. Data acquisition system measured 16 current channels at 500 S/s with 24-bit resolution and sends data to a portable computer over USB. This data were stored in a MS Excel file on the computer by using a user interface created with NI Labview software.

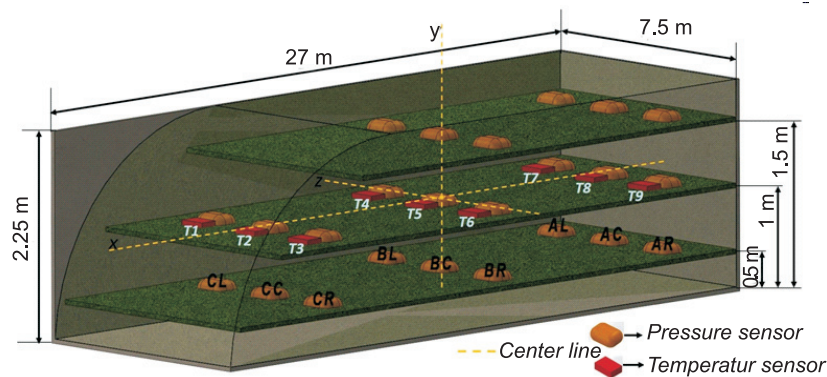


Fig. 1. Measurement points in the bunker silos

**Pressure measurement system (PMS):** PMS has mainly five units (Fig. 2). These are pressure sensing rubber globe (PRG), hydraulic hose connection (HHC), pressure sensors (PS), data collection, recording and storage (DRS) and portable computer (PC).

PRG was connected to pressure sensors via the hydraulic hoses. The sensor outputs were connected to NI DAQ measurement and storage system. Mesens 500 series 4–20 mA of the 4 bar capacity pressure sensors were used. The total pressures generated on the globes were transmitted to the sensors regardless of direction. The connection hoses chosen in the construction could withstand a maximum of 10 bar pressure. In this hydraulically operated system, water was used for pressure transmission (Turner and Raper 2001).

The measurement and storage unit of the PMS was placed in a central position of the side surface of the silo.

**Calibration:** To determine whether the output values of pressure sensors used in the measurement system especially under dynamic conditions were correct and reliable values or not, two different calibration curves were created (Dalmýs 2006, Akýncý 1994). Repeated measurement experiments were carried out to determine the deviations in the measured values at repeated loads (Dalmýs 2006, Akýncý 1994). Load values in the experiments were selected by taking the possible loads encountered in the field conditions and sensor capacities into account.

**Temperature:** Hobo E-348-UA-002-08 model temperature sensors were used for temperature measurements. Effects of the pressure on temperature was assessed in three categories, viz. Ensiling (ET), Fermentation (FT) and After fermentation (AFT).

**Statistical analysis:** To evaluate statistical significance

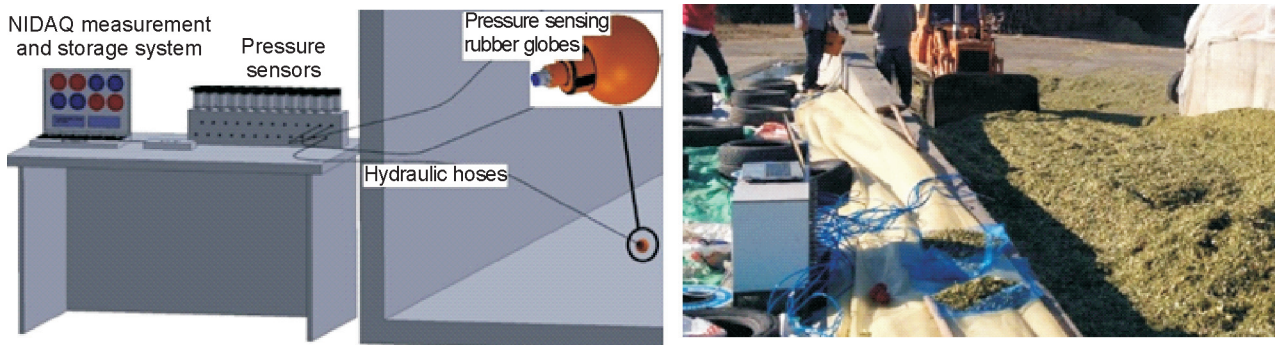


Fig. 2. Pressure measurement system (PMS)

between the pressure and temperature in bunker silo, the data were analyzed using the ANOVA procedure and significant differences among means were determined by Tukey and LSD multiple range test.

## RESULTS AND DISCUSSION

### *Temperature and pressure changes during the ensiling:*

The effects of compaction pressure on temperature was significant in regions while nonsignificant statistically in position. Measured values of temperature and pressure during the ensiling are given in Table 1.

The lowest temperature was measured in the A region (18.30°C), the highest temperature was measured in the C region (29.26°C). Pressure was also lowest in the A region (0.29 bar) and the highest in the C region (0.38 bar). Temperature difference among locations were not different. The lowest temperature and pressure were at the left side walls.

Toruk *et al.* (2010) reported that fermentation

characteristics of the silage were affected positively with increasing compaction. The pressure in the right side walls was higher than the pressure in the middle of the silo and in the left side walls. D'Amours and Savoie (2004) found that the density in the centre was higher than the density near the wall at the bunker silo. At some locations, there was more density in the places near the wall. This indicates that the operator spent more time on regions near the wall than the other regions. Similar values have been found in this research. Latsch (2014) also found that the compacting time in the right side walls in every case a bit longer than in the left side walls. This fact can be explained with the individual influence of the tractor or work machine driver.

*Temperature and pressure changes during the fermentation:* Measured values of temperature and pressure during the fermentation are given in Table 2. Temperature during the fermentation stage was measured higher than the ensiling stage.

The temperature and pressure differences among the

Table 1. Temperature and pressure values measured during the ensiling

Region	Temperature (°C)	Pressure (bar)	Position	Temperature (°C)	Pressure (bar)
A	18.30±1.44 <sup>a</sup>	0.29±0.08 <sup>a</sup>	Left	23.09±5.52	0.282±0.16
B	22.47±4.03 <sup>b</sup>	0.35±0.12 <sup>ab</sup>	Center	23.76±5.51	0.340±0.09
C	29.26±4.04 <sup>c</sup>	0.38±0.09 <sup>b</sup>	Right	23.19±5.87	0.373±0.11
Av.	23.35±5.62	0.34±0.10	Av.	23.35±5.42	0.313±0.12
P	<0.05	<0.05		>0.05	>0.05
F	30.838	3.401		0.037	2.150

\*Mean values in the same column with the same superscript do not differ significantly at P<0.05

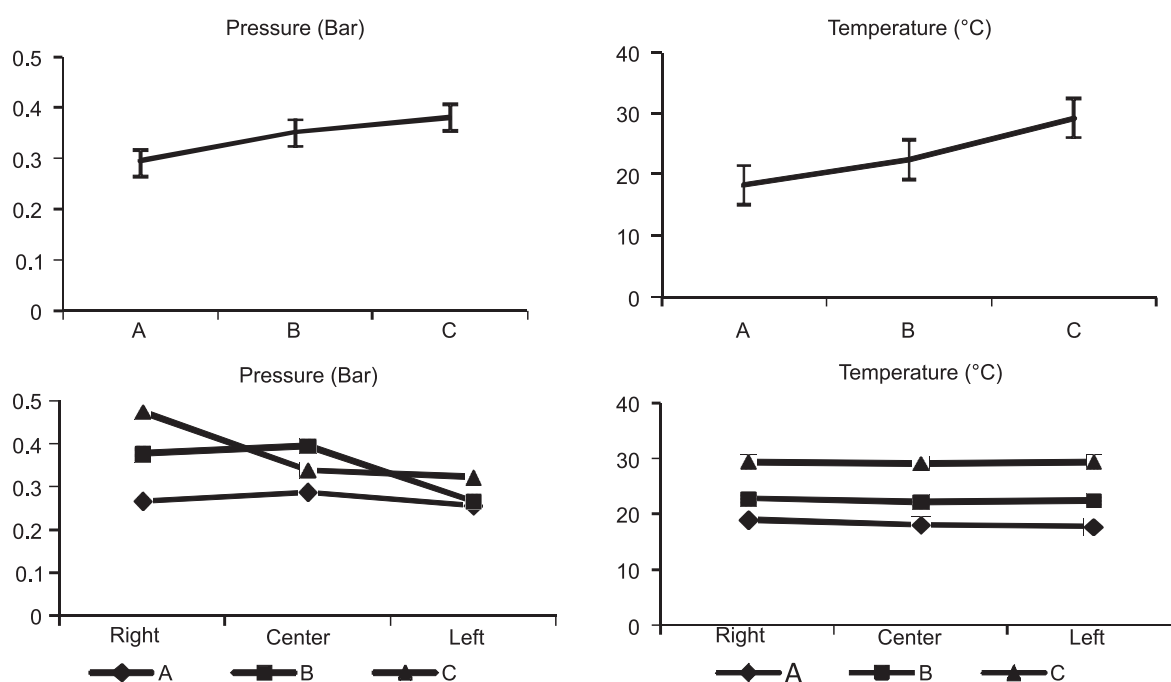


Fig. 3. Temperature was increased with increasing pressure.

Table 2. Temperature and pressure values measured during the fermentation

Region	Temperature (°C)	Pressure (bar)	Position	Temperature (°C)	Pressure (bar)
A	25.12±1.46 <sup>a</sup>	0.022±0.011 <sup>a</sup>	Left	29.03±3.6	0.026±0.01
B	27.74±0.67 <sup>b</sup>	0.042±0.036 <sup>b</sup>	Center	28.80±4.0	0.036±0.01
C	34.26±0.47 <sup>c</sup>	0.044±0.020 <sup>b</sup>	Right	29.29±4.5	0.045±0.06
Av.	29.04±4.03	0.034±0.022	Av.	29.04±4.05	0.022±0.03
P	<0.05	<0.05		>0.05	>0.05
F	315.84	4.84		0.043	2.662

\*Mean values in the same column with the same superscript do not differ significantly at P<0.05.

regions at the fermentation stage were found different. The lowest temperature values were found in A region (25.12°C) and the highest in C region (34.26°C). Pressure was also lowest in the A region and highest in the C region. The pressure measured during the fermentation stage is the pressure measured on the material without compression effect. Pressure and temperature among locations were not been found significant.

The pressure values measured during the fermentation stage were significantly lower than the pressure values measured during the compression stage. Pressure was also the lowest in the A region (0.022 bar) and the highest in the C region (0.044 bar). The highest pressure was in the in the right side walls.

The temperature values in the bunker silo were quite variable. The results are presented in Fig. 4. The maximum temperature recorded was 35.95°C in the C region on fermentation stage and then temperature gradually decreasing to 32°C at the end of fermentation stage. Measured values of temperature and pressure during the fermentation are given in Fig. 5.

High temperatures above 115–120°F (46–48°C) can lead to heat damaged protein. Temperatures in this range may also be detrimental to many lactic acid bacteria that are needed to achieve a successful fermentation (Kung 2011, Jiang *et al.* 1987). The temperatures in this study were found almost successful fermentation temperatures. Temperature of the silage in bunker was positively affected with increasing compaction force.

*Temperature and pressure changes after the fermentation:* Temperature values measured after the

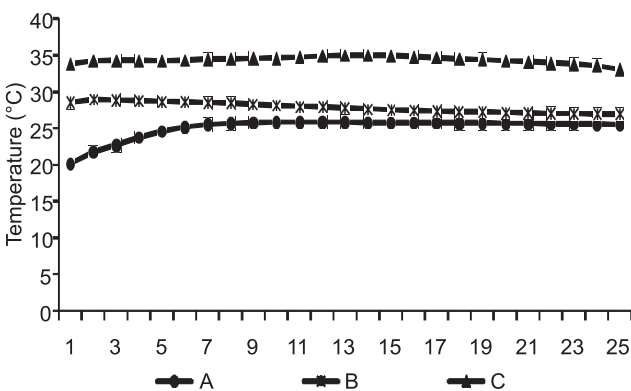


Fig. 4. Temperature changes during the fermentation

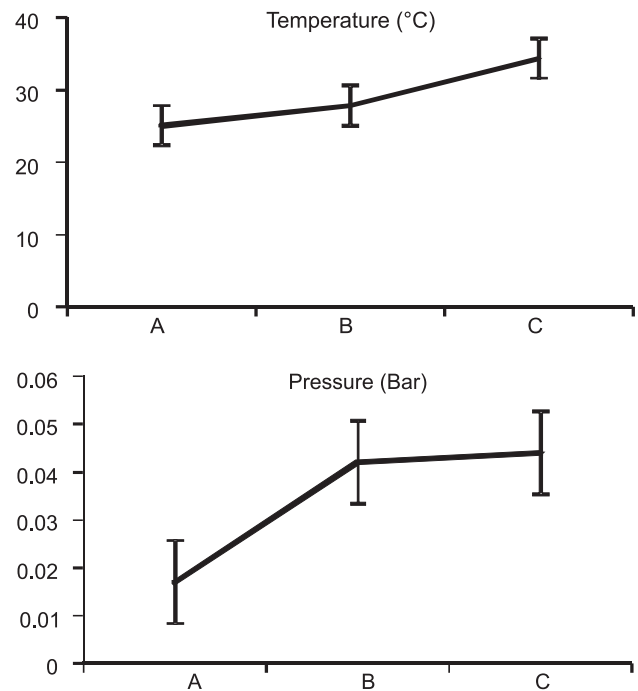


Fig. 5. Temperature and pressure changes during the fermentation

fermentation are given in Table 3. The effects of compaction pressure on temperature was significant in regions while nonsignificant in position. The pressure values were too small to be measured in the after fermentation period.

The temperature values remained 30°C for more than two months. Temperature sensors were retrieved on February 25. The temperature of silage corn after fermentation slowly declined to 21–24°C from 34.69°C. Similar values were found by Kung (2011). The lowest temperature values were found in the A region (21.58°C) and the highest in the C region (25.10°C). The lowest temperature measured was 17–19°C when the fermentation was complete. The effect of the compaction pressure applied in the silage preparation continued during storage.

Results showed that temperature increased by increasing compaction force. Temperature and pressure values were lowest at the A region and highest at the C region in bunker silos. This showed that there was less compaction on the area near the back wall of the silo. Different pressure values were measured in the silo. This indicated that the operator

Table 3. Temperature and pressure values measured after the fermentation

Region	Temperature (°C)	Pressure (bar)	Position	Temperature (°C)	Pressure (bar)
A	21.58±3.28 <sup>a</sup>	-	Left	22.28±5.02	-
B	23.93±3.12 <sup>ab</sup>	-	Center	24.36±4.14	-
C	25.10±6.12 <sup>b</sup>	-	Right	23.98±4.44	-
Av.	23.54±4.57	-	Av.	23.54±4.57	-
P	<0.05			>0.05	
F	3.487			1.237	

\*Mean values in the same column with the same superscript do not differ significantly at P<0.05.

had not operated on the same working time on different regions of the surface of silage during compression. This showed that operator experience in making of silage is as important as other factors affecting silage quality.

#### ACKNOWLEDGEMENTS

This research was supported by the Namik Kemal University (NKUBAP-422), Turkey.

#### REFERENCES

Akinci I. 1994. A research on determination of basic operational data in mechanization planning and development of computer aided measuring system for the determination of energy relations of tractor and agricultural machinery. Ph.D. Thesis. Cukurova University, The Institute of Natural Sciences, Adana.

Borreani G and Tabacco E. 2010. The relationship of silage temperature with the microbiological status of the face of corn silage bunkers. *Journal of Dairy Science* **93**: 2620–29.

Dalmis I S. 2006. Development of a prototype measurement apparatus for determining some physical-mechanical properties of tomatoes to process them after harvest. Ph. D. Thesis. Trakya University. The Institute of Natural Sciences, Tekirdag.

D'Amours L and Savoie P. 2004. Density profile of cornsilage in bunkersilos. ASAE Paper No. 041136. American Society of Agricultural and Biological Engineers, St. Joseph, MI.

Jiang S, Jofriet J C and Buchanan-Smith J. 1987. Temperature observations in a bottom-unloading concrete silo. *Canadian Agricultural Engineering* **30**: 249–55.

Kung L. 2011. Silage Temperatures: How Hot is Too Hot? <https://cdn.canr.udel.edu/wp-content/uploads/2014/02/HowHotisTooHot-2011.pdf>.

Latsch R. 2014. Grass silage compaction in horizontal silos. International Conference of Agricultural Engineering. AnEng 2014, 6–10 July, Zurich.

Muck R E and Holmes B J. 2000. Factors affecting bunker silo densities. *Applied Engineering in Agriculture* **16**(6): 613–19.

Roy M B, Treblay Y, Pomerleau P and Savoie P. 2001. Compaction and density of forage in bunker silos. ASAE Annual International Meeting, Paper No. 01–1089.

Savoie P, Muck R E and Holmes B J. 2004. Laboratory assessment of bunker silo density, Part II: whole-plant corn. *Applied Engineering in Agriculture* **20** (2): 165–71.

Toruk F, Gonulol E, Kayısoglu B and Koc F. 2010. Effects of compaction and maturity stages on sunflower silage quality. *African Journal of Agricultural Research* **5**(1): 055–059.

Turner R and Raper R L. 2001. Soil stress residuals as indicators of soil compaction. ASAE Paper No. 011063.